



HEBEI SINOSTAR TRADING CO.,LTD.

TEL: +86-311-8603 9188 / 311-6726 3625 / 311-8699 9716

FAX: +86-311-8607 3288

EMAIL:SALES@HBSINOSTAR.COM


ADDRESS: NO. 39 XIANGYI ROAD, XINHUA DISTRICT, SHIJIAZHUANG, HEBEI, CHINA

SCAFFOLDING SERIES

GLOBAL SUSTAINABLE SUPPLY CHAIN
INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE




WEBSITE



WECHAT

HEBEI SINOSTAR TRADING CO.,LTD.
QUALITY / SERVICE / HONESTY / SPECIALTY / INNOVATION

PRODUCT
CATALOG

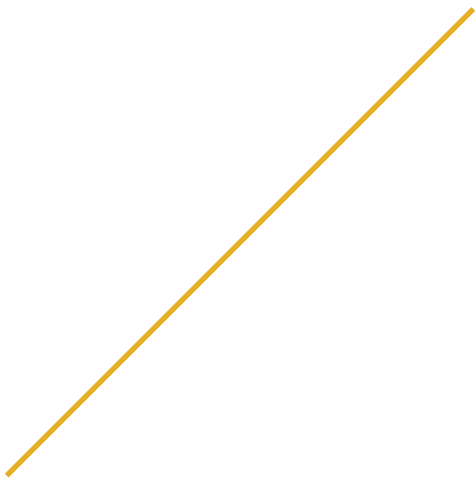

01

About Sinostar

03

Frame Scaffolding

05

Ringlock Scaffolding

07

Kwikstage Scaffolding

09

Cuplock Scaffolding

11

Scaffolding Steel Plank

12

Scaffolding Plank With Hook

13


Multi-functional Scaffolding

14

Steel Scaffolding Prop

15

Scaffolding Accessories

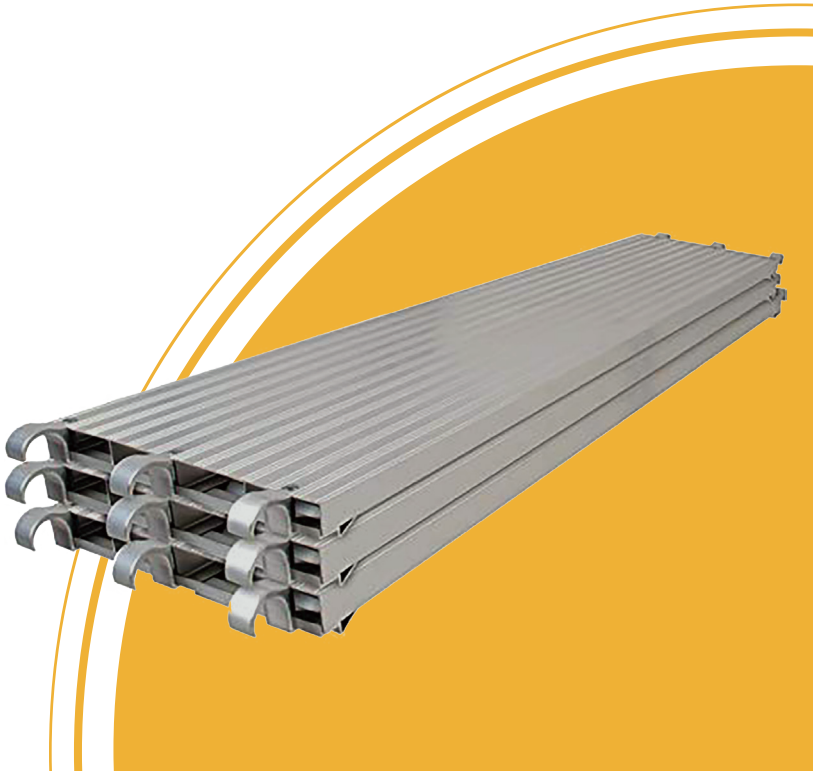



ABOUT SINOSTAR

**GLOBAL SUSTAINABLE SUPPLY CHAIN INTEGRATION PLATFORM
FOR BUILDING MATERIALS & HARDWARE**

Hebei Sinostar Trading Co., Ltd. is a foreign trade company specialized in the import and export of building materials which was founded in 2005. We deal mainly in the import and export of Roofing Sheet; Metal Pipe; Wire and Mesh; Fence and Gate; Fittings and Valves; Fastener and Screw; Iron Art; Scaffolding; Stainless Steel and Aluminium, and other steel products. Our main markets involve EU, Middle and South America, Southeast Asia, the Middle East and Africa areas.

Our group has long experience over 20 years in building materials field. It consists of three trading companies, one pipe mill, one pipe fittings mill and one freight forwarder. During the past years, we have selected more than 500 inspected mills of A level with different advantages on different items/products and cooperate with them tightly.

"Quality, Service, Honesty, Specialty, and Innovation" are our core values, which have formed the soul and DNA of HEBEI SINOSTAR. Every member of the company believes that the unified values generate efficiency for employees, and create competitiveness for customers.

QUALITY

Our QC inspectors monitor the whole process of production of each order to make sure the quality fully meets the market and customers' needs.

SERVICE

We always adhere to the philosophy of "customer-centered, market-oriented", and continuously provide high quality services to our customers.

HONESTY

Honesty is essential in any lasting business and partnership. We consider from the perspective of our customers, we act in an open and transparent way to realize customers value.

SPECIALITY

Professional skills are the foundation of high quality services. Our professional and dedicated team members make customers' business easier and safer.

INNOVATION


Innovation is the key factor of the continuous company success. Driven by the customer needs, we are always focused on the innovation and development to improve our customer satisfaction.

Hebei Sinostar is proud of its young professional and well trained team, that is full of ambition and creativity. Together with the help of all members of our group, we believe that Hebei Sinostar will become the flagship of Hebei foreign trade industry.

FRAME SCAFFOLDING


Material:Pre-galvanized Steel pipes or Q235 steel pipes
Surface:Pre-galvanized, Painted, Powder Coating
Available Size:Other thickness are available on request. Other sizes can be made to order.

WALK THROUGH FRAME

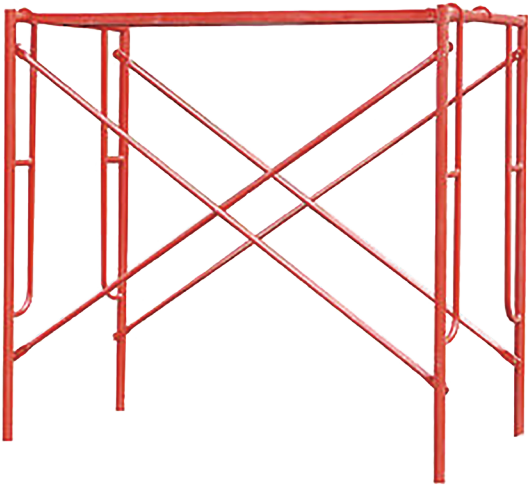


Width × Height	Weight(kg)
1219*1930mm(42*2.2mm,25*1.5mm)	15.2
1219*1930mm(42*2.0mm,25*1.5mm)	14.3
1219*1700mm(42*2.2mm,25*1.5mm)	13.7
1219*1700mm(42*2.0mm,25*1.5mm)	12.8
914*1930mm(42*2.0mm,25*1.5mm)	13.4
1219*1700mm(42*2.2mm,25*1.5mm)	13.4
1219*1700mm(42*2.0mm,25*1.5mm)	12.6
1219*1524mm(42*2.2mm,25*1.5mm)	12.4
1219*1524mm(42*2.0mm,25*1.5mm)	11.4
914*1700mm(42*2.0mm,25*1.5mm)	12.3

MASON FRAME--TypeA

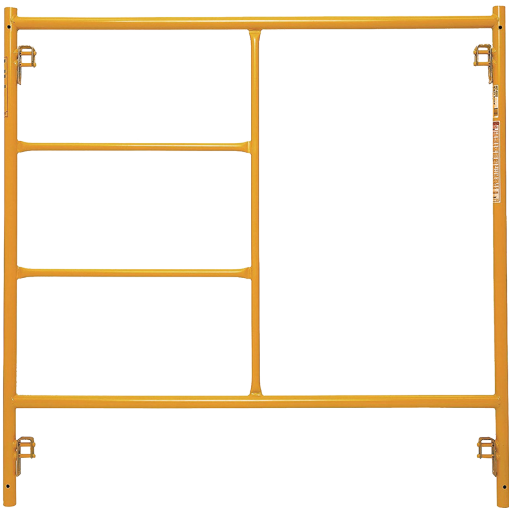


Width × Height	Weight(kg)
1219*1930mm(42*2.2mm,25*1.5mm)	16.4
1219*1930mm(42*2.0mm,25*1.5mm)	15.2
1219*1700mm(42*2.2mm,25*2.0mm)	16.8
1219*1700mm(42*2.0mm,25*1.5mm)	14.6
1219*1700mm(42*2.0mm,25*1.5mm)	13.5
914*1700mm(42*2.2mm,25*1.5mm)	13
1219*1524mm(42*2.0mm,25*2.0mm)	23.7
1219*1219mm(42*2.2mm,25*1.5mm)	11.7
1219*1219mm(42*2.0mm,25*1.5mm)	10.8
914*1524mm(42*2.0mm,25*1.5mm)	10.9

MASON FRAME--TypeB

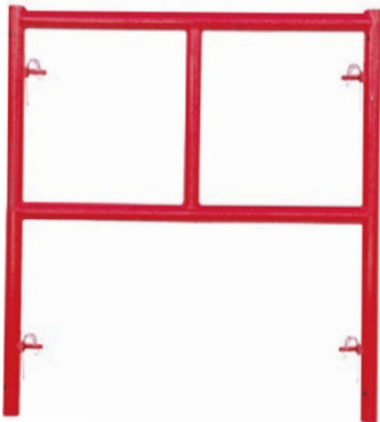

Width × Height	Weight(kg)
1219*914mm(42*2.2,42*2.2mm)	10
1219*914mm(42*2.2,25*1.5mm)	8
1219*914mm(42*2.0,25*1.5mm)	8.7
914*914mm(42*2.2,25*1.5mm)	7.9

HORIZONTAL FRAME

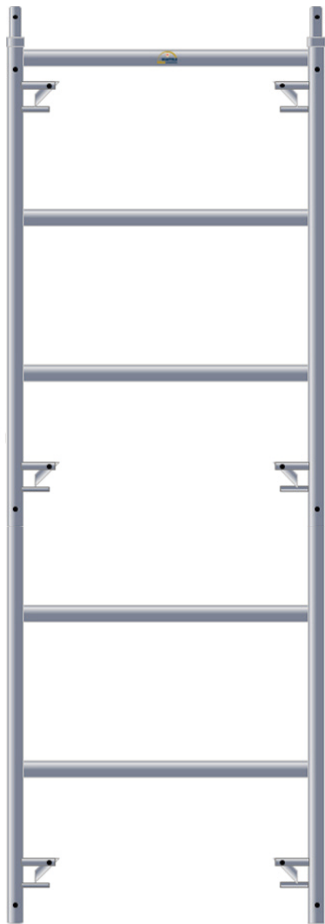

Width × Height	Weight(kg)
1050 × 1829mm(Main tube:42 × 1.8mm, Other tube:25*1.4mm)	8.6
1050 × 1829mm(Main tube:42 × 2.0mm, Other tube:42*1.8mm)	11.2



RINGLOCK SCAFFOLDING

Material:Q235 or Q345 steel pipes
Surface:Hot Dipped Galvanized, Painted
Available Size:Other thickness are available on request. Other sizes can be made to order.

M48 STANDARD		
Size	Length	Surface Treatment
48.3*3.2mm	500mm	Hot Dipped Galvanized, Painted
	1000mm	
	1500mm	
	2000mm	
	2500mm	
	3000mm	

M60 STANDARD		
Size	Length	Surface Treatment
60*3.2mm	500mm	Hot Dipped Galvanized, Painted
	1000mm	
	1500mm	
	2000mm	
	2500mm	
	3000mm	


BASE COLLAR		
Size	Length	Surface Treatment
57*3.5mm	280mm	Hot Dipped Galvanized, Painted
70*3.5mm	370mm	

SPIGOT		
Size	Length	Surface Treatment
38*2.0mm	270mm, M48 Spigot	Hot Dipped Galvanized, Painted
50*2.5mm	250mm, M60 Spigot	


LEDGER		
Size	Length	Surface Treatment
48.3*3.2mm	600mm	Hot Dipped Galvanized, Painted
	900mm	
	1200mm	
	1500mm	
	1800mm	
	2100mm	




DIAGONAL BRACE		
Size	Length	Surface Treatment
48.3*2.4mm	H1500L600	Hot Dipped Galvanized, Painted
	H1500L900	
	H1500L1200	
	H1500L1500	
	H1500L1800	
	H2000L600	
	H2000L900	
	H2000L1200	
	H2000L1500	
	H2000L1800	

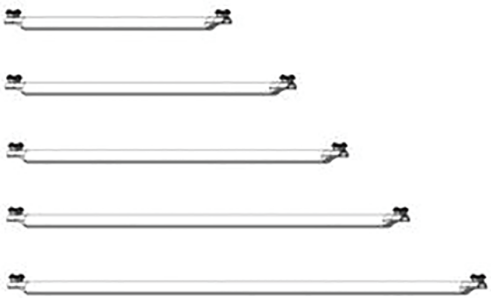


TRIANGLE BRACKET		
Size	Length	Surface Treatment
48.3*3.2mm	L680mm	Hot Dipped Galvanized, Painted
48.3*3.0mm	L732mm	
48.3*3.2mm	L880mm	
48.3*3.2mm	L900mm	



HEAVY TRUSS		
Size	Length	Surface Treatment
48.3*3.0mm	L2000mm	Hot Dipped Galvanized, Painted
	L3000mm	
	L6000mm	



REINFORCED LEDGER		
Size	Length	Surface Treatment
48.3*3.2mm	L1500mm	Hot Dipped Galvanized, Painted
	L1800mm	
	L2000mm	
	L2500mm	
	L3050mm	



INTERMEDIATE TRANSOM		
Size	Length	Surface Treatment
48.3*3.2mm	900mm	Hot Dipped Galvanized, Painted
	1200mm	
	1500mm	




KWIKSTAGE SCAFFOLDING

Standard:AS/NZS 1576
Material:Q235B, Q345B steel pipes
Surface:Hot dipped galvanized, Painted
Available Size:Other thickness are available on request. Other sizes can be made to order.

KWIKSTAGE STANDARD				
Australia Type		South Africa Type		Surface Finish
Size	Length	Size	Length(mm)	
48.3*4mm	3000mm	48.3*3.2mm	500mm	Painted/Hot Dipped Galvanized
	2500mm	48.3*3.3mm	1000mm	
	2000mm	48.3*3.4mm	1500mm	
	1500mm	48.3*3.5mm	2000mm	
	1000mm	48.3*3.6mm	2500mm	
	500mm	48.3*3.7mm	3000mm	

Australia Type		South Africa Type		Surface Finish
Size	Length	Size	Length(mm)	
48.3*3.2mm	3000mm	48.3*3.0mm	600mm	Painted/Hot Dipped Galvanized
	2400mm		800mm	
	1800mm		900mm	
	1200mm		1000mm	
	1000mm		1200mm	
	800mm		1219mm	
	700mm		1500mm	
	500mm		1600mm	
	\		1800mm	
	\		2000mm	
	\		2500mm	
	\			

KWIKSTAGE TRANSOM		
Size	Length	Surface Finish
50*50*5mm	2400mm	Painted/Hot Dipped Galvanized
	1800mm	
	1200mm	
	1000mm	
	800mm	
	700mm	
	500mm	

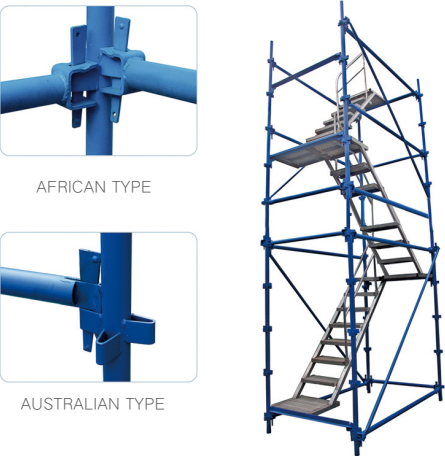

KWIKSTAGE DIAGONAL BRACE

Australia Type		South Africa Type		Surface Finish
Size	Length	Size	Length(mm)	
48.3*3.2mm	3600mm	48.3*2.5mm	2500*2500	Painted/Hot Dipped Galvanized
	3200mm		2500*2000	
	2700mm		2000*2000	
	2100mm		2000*1219	
	1700mm		1500*1500	



KWIKSTAGE TIE BAR

Size	Length	Surface Finish
40*40*4mm	2400mm	Painted/Hot Dipped Galvanized
	1800mm	
	1200mm	
	1000mm	
	700mm	
	500mm	




KWIKSTAGE STEEL BOARD

Australia Type		South Africa Type		Surface Finish
Size	Length	Size	Length(mm)	
230*63mm	540mm		600mm	Hot dipped galvanized, Painted
	740mm		800mm	
	1030mm		900mm	
	1250mm		1000mm	
	1810mm		1200mm	
	2420mm		1219mm	
	3070mm		1500mm	
	\		2000mm	
	\		2500mm	
	\		3000mm	
	\			
	\			



KWIKSTAGE ACCESSORIES

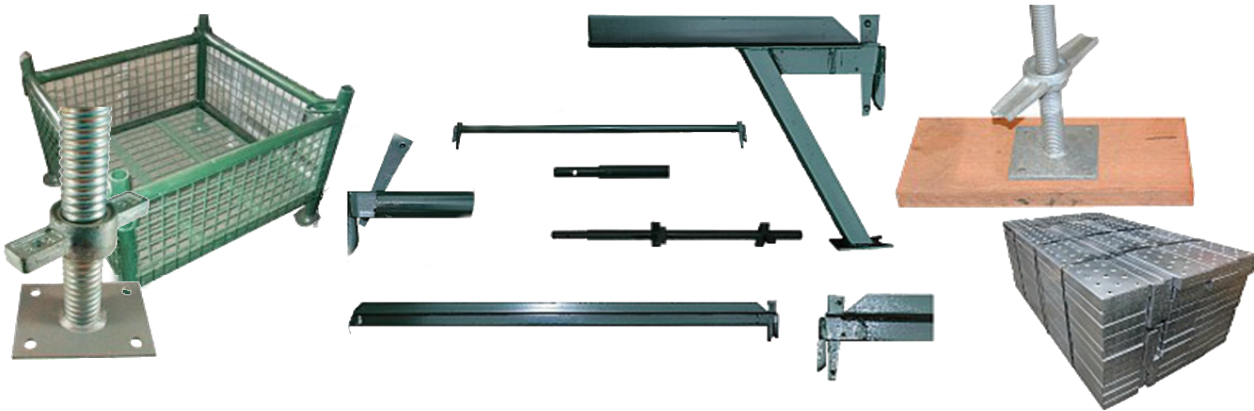

CUPLOCK SCAFFOLDING

Standard:BS12811-2003
Material:Q235B, Q345B steel pipes
Tube:48.3mm
Surface treatment:Self finish, Painted, Hot dipped galvanized
Thickness:2.75-4.0mm
Available Size:Other thickness are available on request. Other sizes can be made to order.


CUPLOCK STANDARD(VERTICAL)			
Length(mm)	Weight(kg)		
	Self Finish(kg)	Painted(kg)	Hot Dipped Galv.(kg)
500	2.42	2.5	2.57
1000	4.84	4.98	5.13
1500	7.25	7.47	7.69
2000	9.67	9.96	10.25
2500	12.08	12.44	12.81
3000	14.5	14.93	15.37




SPIGOT CONNECTOR			
Length(m)	Weight(kg)		
	Self Finish(kg)	Painted(kg)	Hot Dipped Galv.(kg)
0.25	0.69	0.74	0.73



CUPLOCK LEDGER(HORIZONTAL)			
Length(mm)	Weight(kg)		
	Self Finish(kg)	Painted(kg)	Hot Dipped Galv.(kg)
600	2.38	2.45	2.52
900	3.44	3.55	3.65
1200	4.51	4.65	4.78
1300	4.87	5.01	5.16
1800	6.65	6.85	7.05
2500	9.14	9.14	9.69

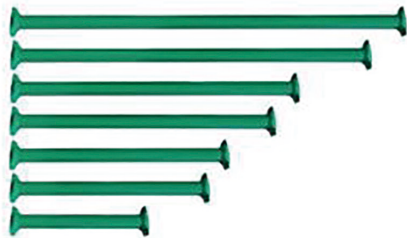


INTERMEDIATE TRANSOM			
Length(mm)	Weight(kg)		
	Self Finish(kg)	Painted(kg)	Hot Dipped Galv.(kg)
1200	5.96	6.14	6.32
1300	6.32	6.51	6.7
1800	8.1	8.34	8.59
2500	10.66	10.98	11.3

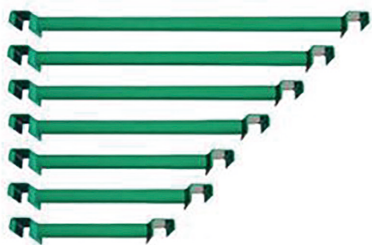

DIAGONAL BRACE

Length(mm)	Weight(kg)		
	Self Finish(kg)	Painted(kg)	Hot Dipped Galv.(kg)
H1.5L1.8*48.3*3	5.96	6.14	6.32
H1.5L2.5*48.3*3	6.32	6.51	6.7
H1.5L1.8*48.3*3	8.1	8.34	8.59
H1.5L2.5*48.3*3	10.66	10.98	11.3

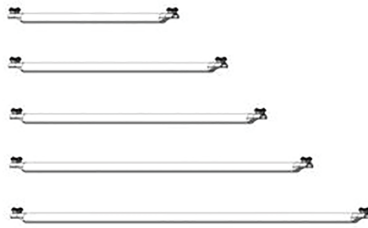

SIDE BOARD SUPPORT

Length(m)	Weight(kg)
0.26	1.5
0.52	2.4



BOARD/BEAM EXTENSION BRACKET

Description	Length(m)	Weight(kg)
2board	0.565	6.3
3board	0.795	7.7




BEAM BRACKET

Length(m)	Weight(kg)
1	3.9
1.5	5.3




CANTILEVER BEAM FRAME

Length(m)	Weight(kg)
1	15.7
1.5	17.6



CANTILEVER FRAME

Length(m)	Weight(kg)
1	15.7
1.5	17.6



TOP CUP



BOTTOM CUP




LEDGER BLADE

SCAFFOLDING STEEL PLANK

Standard:BS EN 12811-1:2003,EN1004:2004 AS/NZS1577:2013
Available Size:0.5m-4m other sizes are available on request
Material:Pre-galvanized steel strip


Steel Plank		
Width x Height x Thickness	Length(mm)	Weight
210*45*1.2mm	1000mm	3.6kg
	2000mm	7.0kg
	3000mm	10.4kg
	4000mm	13.8kg
240*45*1.2mm	1000mm	4.0kg
	2000mm	7.7kg
	3000mm	11.4kg
	4000mm	15.1kg
250*50*1.2mm	1000mm	4.2kg
	2000mm	8.1kg
	3000mm	12.0kg
	4000mm	15.9kg
250*40*1.2mm	1000mm	4.0kg
	2000mm	7.7kg
	3000mm	11.4kg
	4000mm	15.2kg
225*38*1.5mm	1000mm	4.5kg
	2000mm	8.7kg
	3000mm	13.0kg
	4000mm	17.2kg
225*38*1.8mm	1000mm	5.3kg
	2000mm	10.4kg
	3000mm	15.4kg
	4000mm	20.5kg
225*38*2.0mm	1000mm	5.8kg
	2000mm	11.5kg
	3000mm	17.1kg
	4000mm	22.7kg
230*63*1.8mm	540mm	3.8kg
	740mm	5.0kg
	1030mm	6.6kg
	1250mm	7.9kg
	1810mm	11.6kg
	2420mm	15.0kg
	3070mm	18.7kg

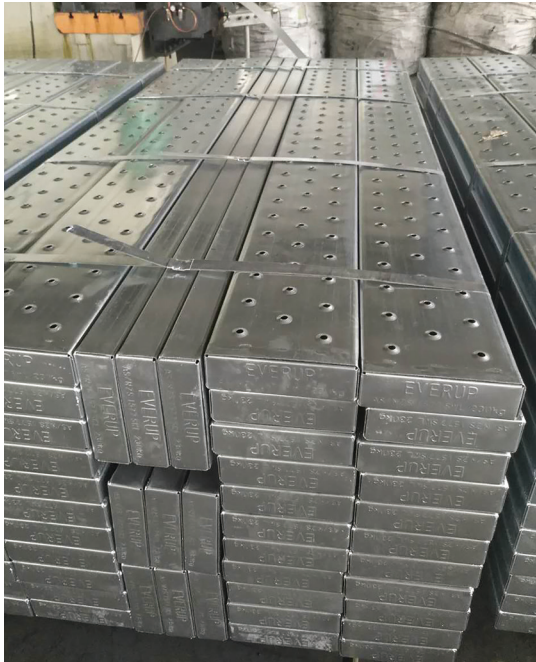

SCAFFOLDING STEEL PLANK WITH HOOK

Standard:BS EN 12811-1:2003,EN1004:2004 AS/NZS1577:2013
Available Size:0.5m-3m other sizes are available on request
Material:Pre-galvanized steel strip

Steel Plank with Hook		
Width x Height x Thickness x Length	Length(mm)	Weight
210*45*1.5mm	1800mm	8.8kg
	2000mm	9.7kg
	2400mm	11.4kg
240*45*1.5mm	900mm	5.3kg
	1200mm	6.6kg
	1500mm	8.1kg
250*50*1.5mm	1500mm	9kg
	1800mm	10.5kg
	2000mm	11.4kg
300*50*1.5mm	600mm	5.2kg
	1200mm	7.9kg
	1829mm	11.7kg
420*45*1.2mm	1500mm	11.4kg
	2000mm	14.7kg
	1829mm	13.6kg
450*45*1.2mm	1829mm	13.5kg
480*45*1.2mm	900mm	7.8kg
	1200mm	9.9kg
	1500mm	12.7kg
500*50*1.2mm	1500mm	13.7kg
	1800mm	16.2kg
	1829mm	15.3kg

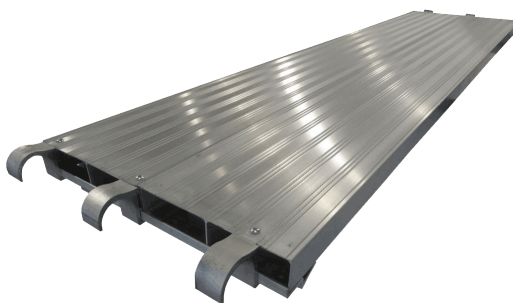



MULTI-FUNCTIONAL SCAFFOLDING

Surface treatment: Powder Coated, Pre-galvanized, Electro galvanized
Available Size: Other thickness are available on request. Other sizes can be made to order.

Multi-functional Scaffolding				
Description	Finish	Quantity(pcs)	Unit Weight(lbs)	Total Weight(lbs)
29"W × 65"H Ladder Frame	Powder Coat	2	24.93	49.86
60"L Platform Truss	Powder Coat	2	21.6	43.2
Plywood Platform	Powder Coat	1	29.65	29.65
5"Caster	Electric Galv.	4	5.07	20.28
Safety Snap Pin	Electric Galv.	8	0.13	1.04
Carton Package				8.81
Total:				152.84



STEEL SCAFFOLDING PROP

Material: Q235B, Q345B steel pipes
Surface treatment: E-galvanized, Pre-galvanized, Hot dipped galvanized, Painted, Powder coated;
Available Size: Other thickness are available on request. Other sizes can be made to order.

Spanish Prop			
Adjust Lenth	Outer Tube	Inner Tube	Wall Thickness
800-1400mm	48mm	40mm	1.5-2.5mm
1600-3000mm	48mm	40mm	
2000-3500mm	48mm	40mm	
2200-4000mm	48mm	40mm	

*Surface treatment painted, powder coated, electro galvanized or hot dipped galvanized



Italian Prop			
Adjust Lenth	Outer Tube	Inner Tube	Wall Thickness
1600-2900mm	56mm	48mm	1.5-2.75mm
1800-3100mm	56mm	48mm	
2000-3600mm	56mm	48mm	
2200-4000mm	56mm	48mm	

*Surface treatment painted, powder coated, electro galvanized or hot dipped galvanized



Spanish Prop			
Adjust Lenth	Outer Tube	Inner Tube	Wall Thickness
1400-2700mm	60.3mm	48.3mm	1.6-4.0mm
1600-2700mm	60.3mm	48.3mm	
1620-2640mm	60.3mm	48.3mm	
2000-3500mm	60.3mm	48.3mm	
2200-4000mm	60.3mm	48.3mm	
3000-5500mm	60.3mm	48.3mm	

*Surface treatment painted, powder coated, electro galvanized or hot dipped galvanized



Spanish Prop			
Adjust Lenth	Outer Tube	Inner Tube	Wall Thickness
1400-2700mm	60.3mm	48.3mm	1.6-4.0mm
1600-2700mm	60.3mm	48.3mm	
1620-2640mm	60.3mm	48.3mm	
2000-3500mm	60.3mm	48.3mm	
2200-4000mm	60.3mm	48.3mm	
3000-5500mm	60.3mm	48.3mm	


*Surface treatment painted, powder coated, electro galvanized or hot dipped galvanized



SCAFFOLDING ACCESSORIES

Material:Q235B, Q345B steel pipes
Surface treatment:E-galvanized, Pre-galvanized, Hot dipped galvanized, Painted, Powder coated;
Available Size:Other thickness are available on request. Other sizes can be made to order.

CROSS BRACE	
A × B × C	Weight(kg)
1219*1524*1952mm(21.3*1.5mm)	2.9
1219*1219*1724mm(21.3*1.5mm)	2.5
1219*1829*2198mm(21.3*1.5mm)	3.2
610*1219*1363mm(21.3*1.5mm)	2
610*1219*1928mm(21.3*1.5mm)	2.8
914*1829*2045mm(21.3*1.5mm)	3
914*1219*1524mm(21.3*1.5mm)	2.3



LOCK PIN	
Diameter × Length	Weight(kg)
12*45mm	0.04



JOINT PIN	
Outer Diameter × Length	Weight(kg)
36*225mm(Y)	0.34
36*225mm(N)	0.34



BASE JACK-SOLID BASE JACK	
Specification	Weight
Screw Jack:30*600mm, Base plate:120*120*4mm	3.58kg
Screw Jack:32*600mm, Base plate:120*120*4mm	4.01kg
Screw Jack:34*610mm, Base plate:150*150*6mm	5.4kg
Screw Jack:34*610mm, Base plate:120*120*4mm	4.51kg




U HEAD JACK--SOLID BASE JACK	
Specification	Weight
Screw Jack:30*600mm, Base plate:150*120*50*4mm	4.08kg
Screw Jack:32*600mm, Base plate:150*120*50*4mm	4.55kg
Screw Jack:34*600mm, Base plate:150*120*50*4mm	5.01kg



STATR CASE	
Width × Length × Height	Weight
W450*2677mm(L1829*H1955mm)	25.55kg
W450*2515mm(L1829*H1725mm)	23.34kg
W450*2370mm(L1500*H2000mm)	23.31kg
W450*2828.4mm(L2000*H2000mm)	26.18kg
W1000*2690.7mm(L1800*H2000mm)	52.02kg
W1000*2828mm(L2000*H2000mm)	52.59kg



ONKEY LADDER	
Width × Length	Weight
300*2000mm(25*1.5,25*1.5mm)	5.7kg
300*3000mm(25*1.5,25*1.5mm)	7.9kg
300*4000mm(25*1.5,25*1.5mm)	10.3kg
300*6000mm(32*2.0,25*1.5mm)	22.1kg



Coupling Pin-TypeA



Coupling Pin-TypeB



Coupling Pin-TypeC



Gravity Lock Pin



Span Pin



Roll Pin



Prop Sleeve



Toggle Pin



Rivet Pin